

SPECTRE 4-M ELITE



Manual

Revision 1.0

Table of Contents

Introduction..... 2

Specifications & Included Items 2

Installation.....3


Introduction

The Spectre 4-M Elite has an all-new design with increased ventilation. It has two thicker acrylic panels and countersunk fasteners to improved durability, quality, and aesthetics. It replaces the front radiator panel which enhances the transparent 'Spectral' look of the case, further showing off the coolant and internal components. The main purpose is an aesthetic feature, although it does increase fluid volume. It has a single inlet and outlet which can be routed in either direction. The ports are positioned on one end of the distribution plate for connection to and from the main case distribution plate and front radiator. Radiators can still be attached and there is ventilation around the perimeter of the distribution plate and through the ventilated sections on the front. There is an LED strip positioned on the edge of the distribution plate so that it glows.

Specifications & Included Items

Distribution Plate	Spectre 4-M Elite Distribution Plate.
Ports	x2 G1/4" BSPP. 1x Inlet. 1x Outlet.
LED Strip	50cm ARGB 5V with 50cm black cable.
Fasteners	Stainless Steel Silver.
Gaskets	Silicone Black.
Materials	Cast Acrylic.
Manufacturing Process	CNC Mill. CNC Router. Laser Cutter.
Assembly	Assembled by hand.
Testing/ Validation	All Distribution Plates are factory pressure tested and precise fastener tension is applied.
Dimensions	L: 528mm x W: 245mm x H: 40mm.
Weight	3kg.
Packaged Dimensions	L: 500mm x W: 300mm x H: 80mm.
Packaged Weight	3.5kg.

Installation

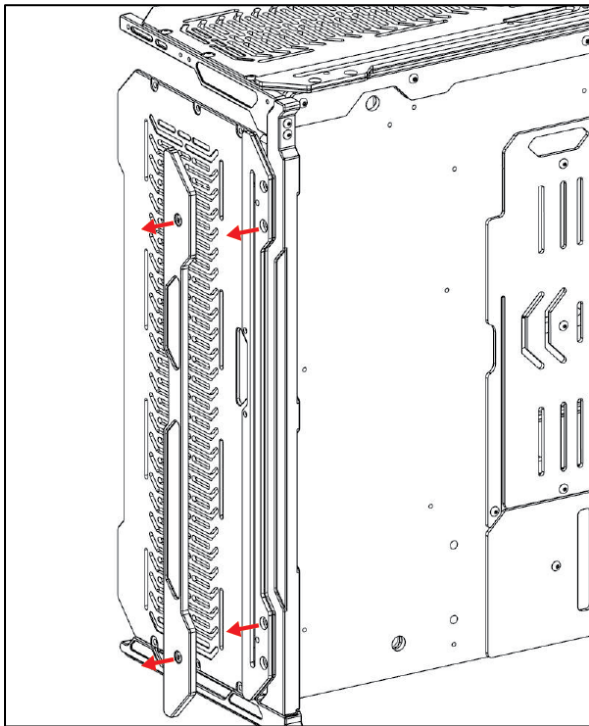

Step 1

To remove the stock front panel, remove the fasteners marked in the diagram beside.

Step 2

Install the Spectre 4-M Elite Front Distribution Plate using the included fasteners.

